


VENTURA[®]

LEGNODECK



WPC DECKING



First Decking with

ZERO GAPS

Infinite Possibilities



Discover Ventura Legnodeck, your premier destination for high-quality WPC (Wood Plastic Composite) decking in India. Engineered with cutting-edge innovation, our decking introduces India's first Zero-Gap plank system — ensuring a flawless finish with no visible gaps after installation.

Combining the timeless elegance of natural wood with the strength and durability of plastic composites, Ventura Legnodeck offers a transformative outdoor flooring solution that's built to last.

Available Colours



WALNUT



TEAK

Technical Details

Length
2440mm

Width
146mm

Thickness
23mm

First Decking with **Zero Gaps** Infinite Possibilities

WHY CHOOSE VENTURA **LEGNODECK** WPC DECKING?

Zero Gap Installation:

Seamless plank-to-plank fitting for a modern, unified look.

Weather-Resistant:

Built to endure harsh climates, resisting rot, decay, and color fading.

Low Maintenance:

No polishing, no painting – just install and enjoy.

Eco-Friendly:

Crafted with sustainability in mind, offering a greener alternative to traditional wood.

Versatile Applications:

Perfect for patios, balconies, terraces, poolside decks, and garden walkways.

Custom Finishes:

Available in a wide range of textures, shades, and wood-like finishes.

Backed by Ventura's legacy of **quality and sustainability**, Legnodeck WPC Decking delivers the perfect blend of **beauty, performance, and eco-conscious living**.

Features



Water
Proof



Long
Lasting



Eco
Friendly



Termite
Resistant



Scratch
Resistant




Impact
Resistant



Weather
Friendly



Low
Maintenance



Fungus
Resistant



WALNUT



TEAK

First Decking with **Zero Gaps** Infinite Possibilities



Walnut


First Decking with **Zero Gaps** Infinite Possibilities



Teak

First Decking with **Zero Gaps** Infinite Possibilities

TECHNICAL DETAILS

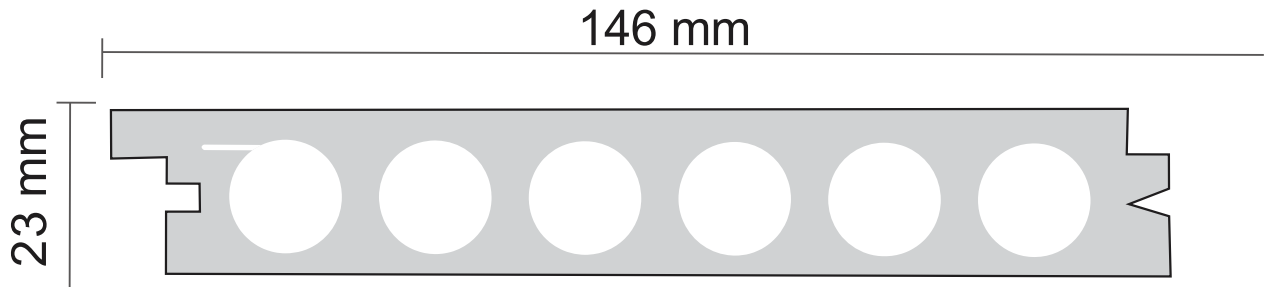

Total Length :	2440 mm (8')
Total Width :	146mm (5.8")
Total Thickness :	23 mm
Surface:	3D wood grain
Ingredients:	55% wood fiber, 35% HDPE, 10% additives
Density :	1.35 gms / cm ³

Certificates: CE, ISO 9001, ISO 14001, FSC

SS Clip
with Screw



End Profile

Walnut



Teak




End Profile Dimension

Size: 50 mm x 50 mm x 2440 mm

First Decking with **Zero Gaps** Infinite Possibilities

INSTALLATION INSTRUCTIONS

1.

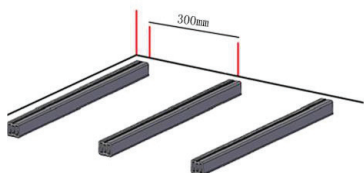


Before laying your deck, make sure the ground is hardening -pretreated .And then fix the joints on the ground .
 We recommend joint space (middle to middle) to be 30-35 cm. Joist spacing can be shorten as per actual needs.

2.




Leave a min. 3 cm spacing if your deck is against the wall or any objective.

3.

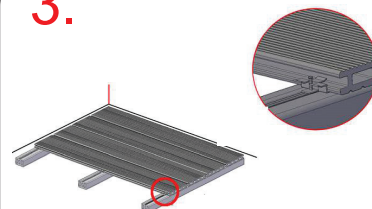

Place the first deck board on the joist. Insert a stainless steel clip on each joist so that it is positioned within the groove on the decking board.
 Screw the clip with the supplied screws to the joist using a slow speed on your drill (Predrill into the joists first and then screw the clips into joist)


4.

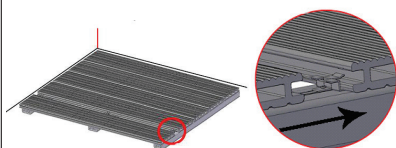

Slide the second board and ensure the slide into position into the grooves. A r hammer is recommend to push the boa for an equal space.


Repeat the steps for the next boards.

5.




IMPORTANT: For butt joints, add a second joist to allow for a second clip.
 Leave a min 5mm gap between the two ends.

6.

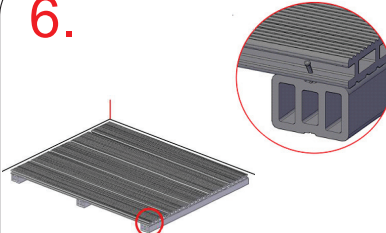

Fasten the last board on the joists by screwing the groove at 45 degree angel if end clip is not unavailable.

7.

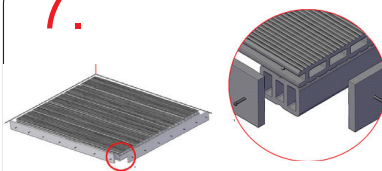

Predrill the fascia boards and screw them into the joists. For the end of decking boards, place a block wood between joist and facial board to allow for expansion and contraction. Install the fascia board into the block wood and through the joist.

Do's & Don'ts



Do's for Ventura Legnodeck WPC Decking Flooring

Install on a firm & even base (concrete, tiles, or joists) to avoid sagging.

Maintain proper ventilation below the decking to prevent moisture buildup.

Clean regularly with water and mild soap to remove dust, stains, and debris.

Use protective pads under heavy furniture to avoid scratches.

Allow expansion gaps during installation as WPC expands/contracts with temperature.

Use stainless steel or coated fasteners to prevent rust.

Trim plants and maintain drainage to prevent waterlogging.

Follow manufacturer guidelines for spacing, fastening, and finishing.



Don'ts for Ventura Legnodeck WPC Decking Flooring

Don't install directly on soil, grass, or uneven surfaces.

Don't use strong acidic or solvent-based cleaners that can damage the surface.

Don't drag heavy objects or sharp furniture without protection.

Don't block water drainage holes; stagnant water may cause stains.

Don't leave barbecue grills, hot pans, or cigarettes directly on decking (heat may deform it).

Don't skip the expansion gaps; it can cause warping in hot/cold weather.

Don't use nails directly; always use recommended clips or screws.

Don't ignore periodic inspection tighten loose screws or replace damaged boards.

VENTURA®
Since 1994

beautifying
lives

Ventura International Pvt. Ltd.

Office • Architectural Experience Centre

1/120, W.H.S., Kirti Nagar, New Delhi-110015 Phone: 91-11-4554 6700 (100 Lines)

-mail: mktg@venturaindia.com Website: www.venturaindia.com



- @/Venturaintl
- in/Venturaint
- f/venturaintnl
- /user/venturaindi